

# 4" 360° Rotatable Led Gimbal Downlight 3 Colours IN 1



## Product Description

**Reliable Quality:** This IC rated downlight is permitted to be in direct contact with combustible material. It is also wet locations rated. Extended 12" Driver FT1 18 inch plenum rated DC wire. Featuring a solid metallic blue J-Box.

### Body:

Durable airtight aluminum body with UV stable paint and white PMMA COB diffuser lens for low glare. Includes silicone gasket for wet location applications. Includes a newly EZ Slide 360 degree design inner heat dissipation ring. Enabling functional efficiency as well as a cosmetically smoother, round finish.

### LED Characteristics

This general application light fixture features a 10 watt LED, COB module that maintains uniform intensity producing up to 750 lumens; with a CRI of 90+. Available with a 3 step CCT switch (3000K, 4000K and 5000K) or Wall Switch on "SW" Mode.

### Beam Spread

The fixture lens provides 40°beam spread.


Quick Connect push-in terminals  
"Quick connect" push-in terminals for quick and easy installation.

## Applications

**Dimming**  
100%-10% dimming capability. This fixture is compatible with industry standard TRIAC/ELV dimmers.

**Operating Temperature**  
-30°C~45°C (-22°F~113°F)

**LED Driver**  
Extruded aluminum hardwire box with 90mA dimmable class II electronic LED driver with 110-120V AC input. Includes an 18" plenum rated FT1 wire with DC 2.1 connector from driver to fixture.

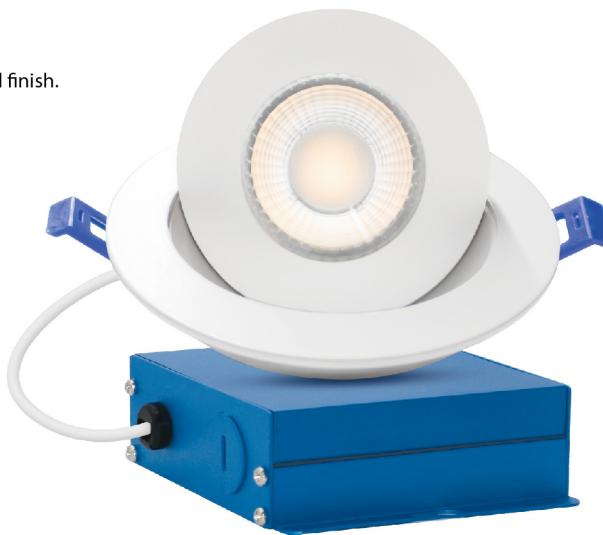

## Specification

	Input Power	Lumen Output	Equiv	Size	Power Factor	CCT
<b>ELSDW0504G13WH-10</b>	10W	750lm	75W	4"	>0.9	3000K/4000K/5000K
Input Voltage	Dimmable	Beam Angle	CRI	Application	Materials	Lifespan
AC120V/60Hz	Yes	40degree	>90Ra	Wet Location	Aluminum	50,000 Hours

## Product Dimensions

