



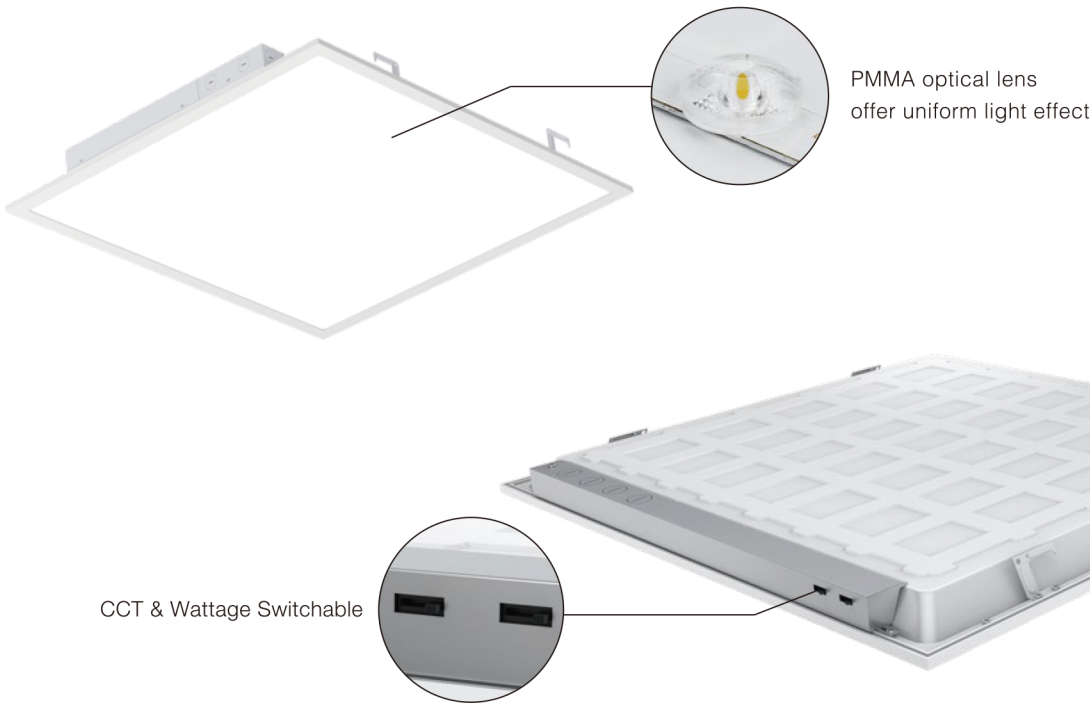

LED Backlit Panel Light

- No Light Guide Plate, will not turn yellowing
- PMMA optical lens offer uniform light effect
- Price is 30% lower than edge-lit design
- 0-10V dimmable, flicker-free, external driver with J-box
- Recessed and suspended for installation

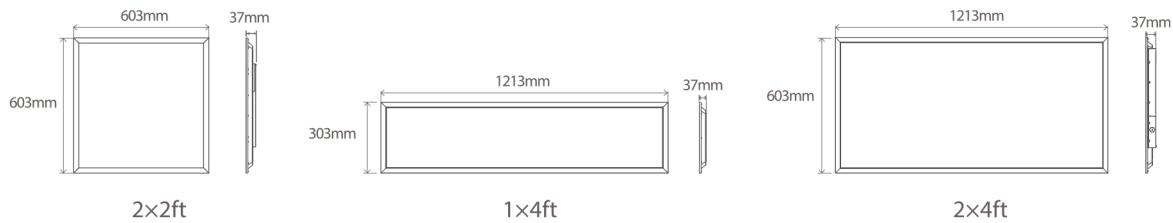

Isolated Driver

Code	Size	Watt	CCT	Efficiency	Voltage	Beam Angle	CRI	Cert
PL2X2-40W	2X2ft	40W	3000K,3500K,4000K,5000K	110lm/W 125lm/W	AC120-277V AC120-347V 0-10V Dim	120°	>80	ETL
PL1X4-40W	1X4ft	40W	3000K,3500K,4000K,5000K	110lm/W 125lm/W	AC120-277V AC120-347V 0-10V Dim	120°	>80	ETL
PL2X4-50W	2X4ft	50W	3000K,3500K,4000K,5000K	110lm/W 125lm/W	AC120-277V AC120-347V 0-10V Dim	120°	>80	ETL
PL2X4-60W	2X4ft	60W	3000K,3500K,4000K,5000K	110lm/W 125lm/W	AC120-277V AC120-347V 0-10V Dim	120°	>80	ETL
PL2X2-40W-C3	2X2ft	40W	3500K/4000K/5000K Selectable	110lm/W 125lm/W	AC120-277V AC120-347V 0-10V Dim	120°	>80	ETL
PL1X4-40W-C3	1X4ft	40W	3500K/4000K/5000K Selectable	110lm/W 125lm/W	AC120-277V AC120-347V 0-10V Dim	120°	>80	ETL
PL2X4-50W-C3	2X4ft	50W	3500K/4000K/5000K Selectable	110lm/W 125lm/W	AC120-277V AC120-347V 0-10V Dim	120°	>80	ETL
PL2X4-60W-C3	2X4ft	60W	3500K/4000K/5000K Selectable	110lm/W 125lm/W	AC120-277V AC120-347V 0-10V Dim	120°	>80	ETL
PL2X2-40W-A3	2X2ft	25/30/40W Selectable	3000K,3500K,4000K,5000K	110lm/W 125lm/W	AC120-277V AC120-347V 0-10V Dim	120°	>80	ETL
PL1X4-40W-A3	1X4ft	25/30/40W Selectable	3000K,3500K,4000K,5000K	110lm/W 125lm/W	AC120-277V AC120-347V 0-10V Dim	120°	>80	ETL
PL2X4-50W-A3	2X4ft	30/40/50W Selectable	3000K,3500K,4000K,5000K	110lm/W 125lm/W	AC120-277V AC120-347V 0-10V Dim	120°	>80	ETL
PL2X4-60W-A3	2X4ft	40/50/60W Selectable	3000K,3500K,4000K,5000K	110lm/W 125lm/W	AC120-277V AC120-347V 0-10V Dim	120°	>80	ETL
PL2X2-40W-A3C3	2X2ft	25/30/40W Selectable	3500K/4000K/5000K Selectable	110lm/W 125lm/W	AC120-277V AC120-347V 0-10V Dim	120°	>80	ETL
PL1X4-40W-A3C3	1X4ft	25/30/40W Selectable	3500K/4000K/5000K Selectable	110lm/W 125lm/W	AC120-277V AC120-347V 0-10V Dim	120°	>80	ETL
PL2X4-50W-A3C3	2X4ft	30/40/50W Selectable	3500K/4000K/5000K Selectable	110lm/W 125lm/W	AC120-277V AC120-347V 0-10V Dim	120°	>80	ETL
PL2X4-60W-A3C3	2X4ft	40/50/60W Selectable	3500K/4000K/5000K Selectable	110lm/W 125lm/W	AC120-277V AC120-347V 0-10V Dim	120°	>80	ETL
PL2X2-40W-A5C5	2X2ft	20/25/30/35/40W Selectable	3000K/3500K/4000K/5000K/6000K Selectable	110lm/W 125lm/W	AC120-277V 0-10V Dim	120°	>80	ETL
PL1X4-40W-A5C5	1X4ft	20/25/30/35/40W Selectable	3000K/3500K/4000K/5000K/6000K Selectable	110lm/W 125lm/W	AC120-277V 0-10V Dim	120°	>80	ETL
PL2X4-50W-A5C5	2X4ft	30/35/40/45/50W Selectable	3000K/3500K/4000K/5000K/6000K Selectable	110lm/W 125lm/W	AC120-277V 0-10V Dim	120°	>80	ETL
PL2X4-60W-A5C5	2X4ft	30/35/40/50/60W Selectable	3000K/3500K/4000K/5000K/6000K Selectable	110lm/W 125lm/W	AC120-277V 0-10V Dim	120°	>80	ETL

Remarks: All above efficiency is subject to 4000K, please check IES files for accurate data.

Non-isolated Driver

Code	Size	Watt	CCT	Efficiency	Voltage	Beam Angle	CRI	Cert
PL2X2-40W-A3C3	2X2ft	25/30/40W Selectable	3500K/4000K/5000K Selectable	110lm/W 125lm/W	AC120-277V 0-10V Dim	120°	>80	UL
PL1X4-40W-A3C3	1X4ft	25/30/40W Selectable	3500K/4000K/5000K Selectable	110lm/W 125lm/W	AC120-277V 0-10V Dim	120°	>80	UL
PL2X4-50W-A3C3	2X4ft	30/40/50W Selectable	3500K/4000K/5000K Selectable	110lm/W 125lm/W	AC120-277V 0-10V Dim	120°	>80	UL
PL2X4-72W-A3C3	2X4ft	50/60/72W Selectable	3500K/4000K/5000K Selectable	110lm/W 125lm/W	AC120-277V 0-10V Dim	120°	>80	UL
PL2X2-40W-A5C5	2X2ft	20/25/30/35/40W Selectable	3000K/3500K/4000K/5000K/6000K Selectable	110lm/W 125lm/W	AC120-277V 0-10V Dim	120°	>80	UL
PL1X4-40W-A5C5	1X4ft	20/25/30/35/40W Selectable	3000K/3500K/4000K/5000K/6000K Selectable	110lm/W 125lm/W	AC120-277V 0-10V Dim	120°	>80	UL
PL2X4-50W-A5C5	2X4ft	30/35/40/45/50W Selectable	3000K/3500K/4000K/5000K/6000K Selectable	110lm/W 125lm/W	AC120-277V 0-10V Dim	120°	>80	UL
PL2X4-60W-A5C5	2X4ft	30/35/40/50/60W Selectable	3000K/3500K/4000K/5000K/6000K Selectable	110lm/W 125lm/W	AC120-277V 0-10V Dim	120°	>80	UL
PL2X4-72W-A5C5	2X4ft	30/40/50/60/72W Selectable	3000K/3500K/4000K/5000K/6000K Selectable	110lm/W 125lm/W	AC120-277V 0-10V Dim	120°	>80	UL

Remarks: All above efficiency is subject to 4000K, please check IES files for accurate data.