




Recessed




Suspended

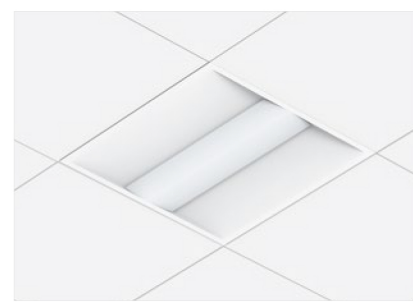


Suspending Kits

LED Troffer


- option1--3CCT & 3 Wattage
- option2--5CCT & 5 Wattage
- AC120-277V
- Flicker free driver available
- Motion sensor for option
- Emergency battery drivers for option
- Mounting: recessed, suspension or surface mounting

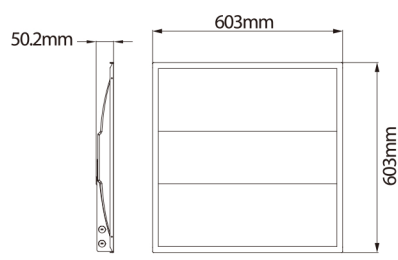

2X2 FT

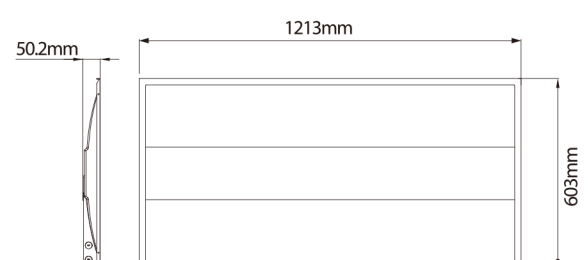

2X4 FT

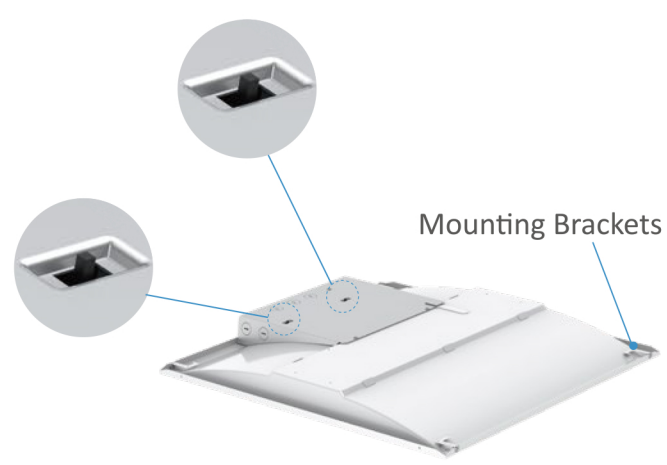

Back View



SELECTABLE WATTAGE

20W ➡ 30W ➡ 40W
30W ➡ 35W ➡ 40W ➡ 50W ➡ 60W

SELECTABLE CCT

3500K ➡ 4000K ➡ 5000K
3000K ➡ 3500K ➡ 4000K ➡ 5000K ➡ 6000K

Applications

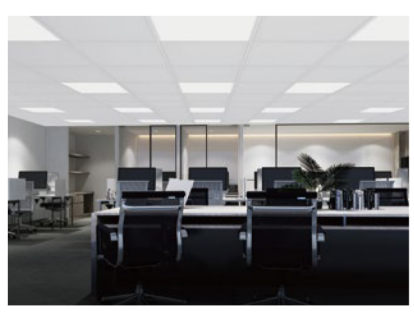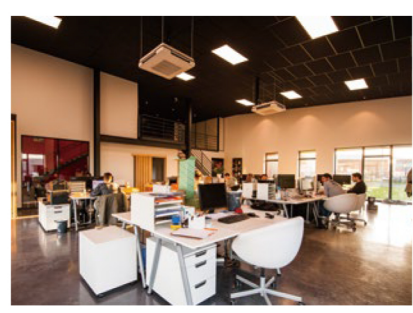

Code	Size	Watt	CCT	Efficiency	Voltage	Beam Angle
TR01-22-40-X-YY	2X2ft	40W	3000K,4000K,5000K	125lm/W	AC120-277V AC120-347V 0-10V Dim	120°
TR01-24-50-X-YY	2X4ft	50W	3000K,4000K,5000K	125lm/W	AC120-277V AC120-347V 0-10V Dim	120°
TR01-22-40-X-A3C3	2X2ft	3 Watts Selectable 20W/30W/40W	3 CCT Selectable 35K/40K/50K	125lm/W	AC120-277V AC120-347V 0-10V Dim	120°
TR01-24-50-X-A3C3	2X4ft	3 Watts Selectable 30W/40W/50W	3 CCT Selectable 35K/40K/50K	125lm/W	AC120-277V AC120-347V 0-10V Dim	120°
TR01-22-40-X-A5C5	2X2ft	5 Watts Selectable 20W/25W/30W/35W/40W	5 CCT Selectable 30K/35K/40K/50K/60K	125lm/W	AC120-277V AC120-347V 0-10V Dim	120°
TR01-24-60-X-A5C5	2X4ft	5 Watts Selectable 30W/35W/40W/50W/60W	5 CCT Selectable 30K/35K/40K/50K/60K	125lm/W	AC120-277V AC120-347V 0-10V Dim	120°

Remarks: All above efficacy are subject to 4000K, please check IES files for accurate data