

4" SLIM LED RECESSED DOWNLIGHT 3 COLOURS IN 1



Product Description

Reliable Quality: This IC rated downlight is permitted to be in direct contact with combustible material. It is also wet locations rated. Extended 12" Driver FT1 18 inch plenum rated DC wire.

Body:

Durable airtight aluminum body with UV stable paint and white PMMA diffuser lens for low glare. Includes silicone gasket for wet location applications. Featuring a newly designed inner heat dissipation ring. Enabling functional efficiency as well as a cosmetically smoother, round finish. A new 6mm trim adding a luxury finish and curb appeal.

LED Characteristics

This general application light fixture features eco-friendly 8 watt premium LED modules that maintain uniform intensity, producing up to 850 lumens; with a typical CRI of 80+. Available in 4 different selectable colour variations (kelvins) 3CCT which are: (3000K, 4000K & 5000K) or "SW" Mode via wall switch.

Beam Spread

The fixture lens provides 120°beam spread.

Quick Connect push-in terminals
"Quick connect" push-in terminals for quick and easy installation.

Applications

Dimming
100%-10% dimming capability. This fixture is compatible with industry standard TRIAC/ELV dimmers.

Operating Temperature
-30°C~45°C (-22°F~113°F)


LED Driver
Extruded aluminum hardwire box with 80mA dimmable class II electronic LED driver with 110-120V AC input. Includes an 18" plenum rated FT1 wire with DC 2.1 connector from driver to fixture.



Specification

	Input Power	Lumen Output	Equiv	Size	Power Factor	CCT
ELSDR1604G25WH-08	8W	850lm	75W	4"	>0.9	3000K/ 4000K/5000K
Input Voltage	Dimmable	Beam Angle	CRI	Application	Materials	Lifespan
AC120V/60Hz	Yes	120degree	>80Ra	Wet Location	Aluminum	50,000 Hours

Product Dimensions

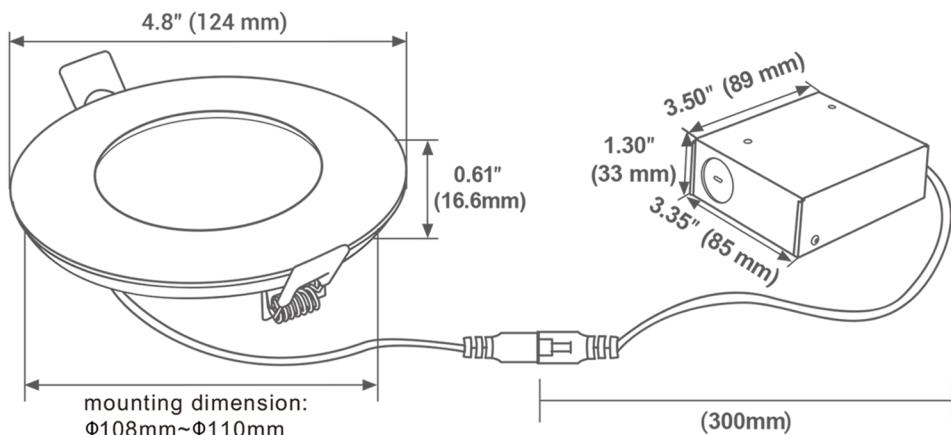

" The Art Of Light"

EMPIRE LED SOLUTIONS CANADA

Tel: +1 (866) 814-6539 E-mail: chelsea@elscanada.ca Website: www.elscanada.ca

A.L Global Canada Inc. All Rights Reserved

ELS CANADA ©