


NEW

ELSTL228




LED Track Light


- 5CCT Selectable 2700K/3000K/3500K/4000K/5000K
- High color rendering CRI90 helps makes colors brighter and more vivid
- High lumen COB chip and PMMA lens offer a uniform lighting output
- High efficacy up to 100LM/W
- AL6063 aluminum lamp body provides excellent heat dissipation
- Arm can spin up to 350° (horizontal), and head can be adjusted up to to 90° (vertical)



10W




15W / 20W/25W




30W

Code	Size	Watt	CCT	Efficiency	Voltage	Beam Angle	CRI
TL228-10W-P5	Φ65x237.75	10W	2700K/3000K/3500K/4000K/5000K Selectable	80-100lm/W	120V	24°/30°/45°	>90
TL228-15W-P5	Φ85x258.70	15W	2700K/3000K/3500K/4000K/5000K Selectable	100lm/W	120V	24°/36°/60°	>90
TL228-20W-P5	Φ85x258.70	20W	2700K/3000K/3500K/4000K/5000K Selectable	100lm/W	120V	24°/36°/60°	>90
TL228-25W-P5	Φ85x258.70	25W	2700K/3000K/3500K/4000K/5000K Selectable	100lm/W	120V	24°/36°/60°	>90
TL228-30W-P5	Φ100x291.40	30W	2700K/3000K/3500K/4000K/5000K Selectable	100lm/W	120V	24°/36°/60°	>90

Remarks: All above efficiency is subject to 4000K, please check IES files for accurate data.

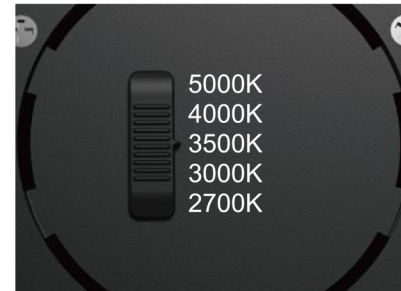

Field-adjustable CCT Switch

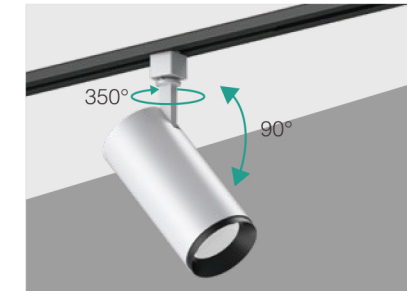

350° horizontal aiming and 90° indexed vertical aiming

