

NEW





VEGA Series S

Residential & Commercial Applications




Architectural Linear Light

3 CCT and 3 Wattage adjustable
Adjustable Up & Down lighting distribution
Seamless splicing design, standard cover only for one fixture
DIY soft cover can be cut by users after splicing several fixtures
Strong structure design, aluminum housing provides a great thermal management
High efficiency up to 110lm/W
0-10V dimming, internal driver
Suspended / wall mounted / surface mounted / splicing installation

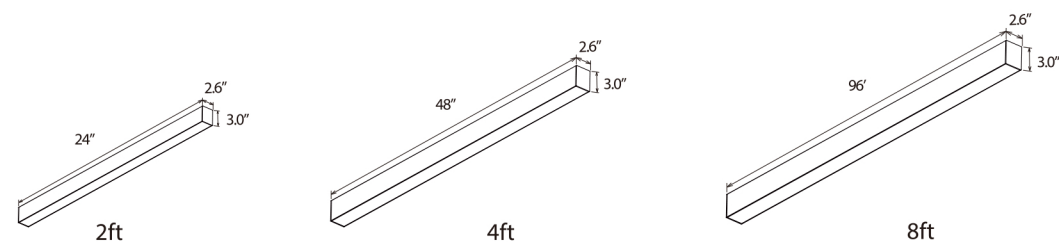


Code	Size	Watt	Lighting Distribution	CCT	Voltage	Efficiency	Beam Angle	CRI
ELSD77E-2-24W	2ft	24W	100% Down OR 30% Up & 70% Down	3000K, 4000K, 5000K,	AC120-277V AC120-347V 0-10V Dim	110lm/W	120°	>80
ELSD77E-4-36W	4ft	36W				110lm/W	120°	>80
ELSD77E-4-50W	4ft	50W				110lm/W	120°	>80
ELSD77E-8-72W	8ft	72W				110lm/W	120°	>80
ELSD77E-8-100W	8ft	100W	UP:100% & DOWN:0% UP:70% & DOWN:30% UP:50% & DOWN:50% UP:30% & DOWN:70% UP:0% & DOWN:100%	UP: 35/40/50K Select Down: 35/40/50K Select	AC120-277V AC120-347V 0-10V Dim	110lm/W	120°	>80
ELS24DB77E-A5C3	2ft	24W				110lm/W	120°	>80
ELS36DB77E-A5C3	4ft	36W				110lm/W	120°	>80
ELS50DB77E-A5C3	4ft	50W				110lm/W	120°	>80


Remarks: All above efficiency is subject to 4000K, please check IES files for accurate data.

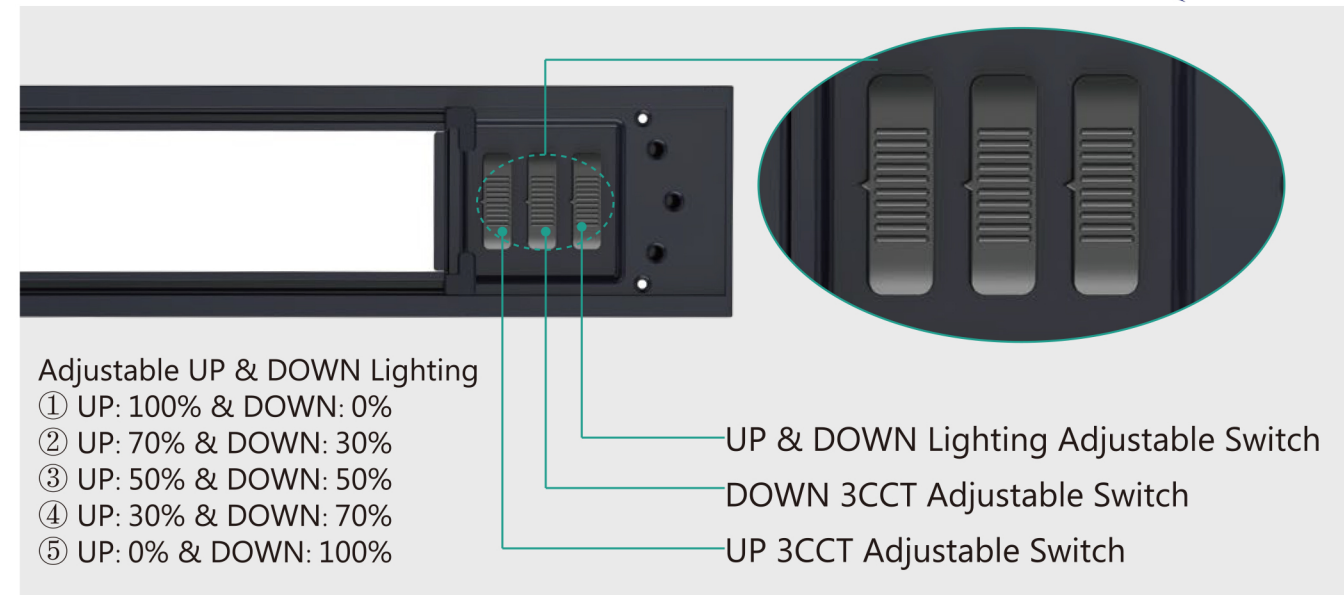


Surface Mounted




Suspended Mounted




Wall Mounted

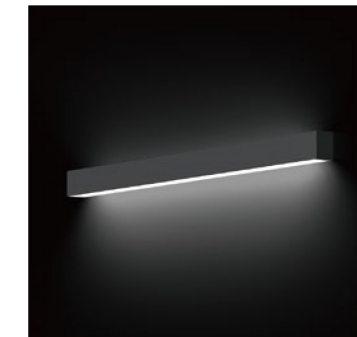



Splicing Installation



Surface Mounted



Suspended Mounted



Wall Mounted

