

# 4" SLIM LED RECESSED DOWNLIGHT 3 COLORS IN 1



## Product Description

**Reliable Quality:** This IC rated downlight is permitted to be in direct contact with combustible material. It is also wet locations rated. Extended 12" Driver FT4 18 inch plenum rated DC wire. (2Hour Fire Rating)

**Body:**  
Durable airtight aluminum body with UV stable paint and white PMMA diffuser lens for low glare. Includes silicone gasket for wet location applications. Featuring a newly designed inner heat dissipation ring. Enabling functional efficiency as well as a cosmetically smoother, round finish. A new 6mm trim adding a luxury finish and curb appeal.

### LED Characteristics

This general application light fixture features eco-friendly 8 watt premium LED modules that maintain uniform intensity, producing up to 850 lumens; with a quality 90CRI build. Available in 3 different selectable colour variations (kelvins) 3CCT which are: (3000K, 4000K & 5000K) or "SW" Mode via wall switch.

### Beam Spread

The fixture lens provides 120°beam spread.

Quick Connect push-in terminals

"Quick connect" push-in terminals for quick and easy installation.


### Applications

#### Dimming

100%-10% dimming capability. This fixture is compatible with industry standard TRIAC/ELV dimmers.

#### Operating Temperature

-30°C~45°C (-22°F~113°F) Extruded aluminum hardwire box with 80mA dimmable class II electronic LED driver with 110-120V AC input. Includes an 18" plenum rated FT4 wire with DC 2.1 connector from driver to fixture.

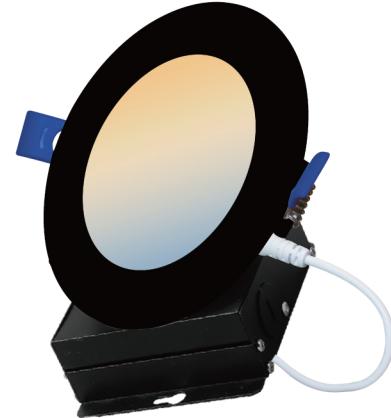

### LED Driver:


Extruded aluminum hardwire box with 80mA dimmable class II electronic LED driver with 110-120VAC input. Includes an 18" plenum rated FT4 wire with DC 2.1 connector from driver to fixture.



### Specification

	Input Power	Lumen Output	Equiv	Size	Power Factor	CCT
<b>ELSDR1604G25BK-08</b>	8W	850lm	75W	4"	>0.9	3000K/4000K/5000K
Input Voltage	Dimmable	Beam Angle	CRI	Application	Materials	Lifespan
AC120V/60Hz	Yes	120 degree	>90	Wet Location	Aluminum	50,000 Hours

### Product Dimensions

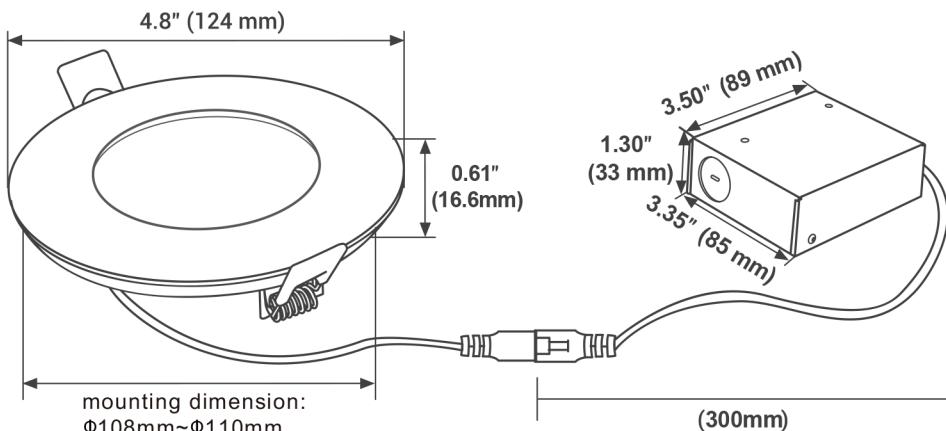

**EMPIRE LED SOLUTIONS CANADA**

Tel: +1 (866) 814-6539 E-mail: chelsea@elscanada.ca Website: [www.elscanada.ca](http://www.elscanada.ca)